

www.nobleliftna.com

NOBLELIFT
NORTH AMERICA

LITHIUM-ION

FE4C50-65

5,000-6,500 lbs. Capacity
Four Wheel Lithium-Iron Cushion



Why choose between price and quality **WHEN YOU CAN HAVE BOTH!**

HIGHLIGHTS

- ▶ Powerful high quality AC drive system
- ▶ Infinitely variable hydraulic control speeds
- ▶ On-demand fully hydrostatic power steering (FHPS)
- ▶ 4-Way proportional hydraulic control valve
- ▶ Side-shift
- ▶ Multi-function LED Display
- ▶ Deluxe suspension seat
- ▶ Tilt steering column
- ▶ Intelligent Monitoring System (IMS) display indicators
- ▶ CAN-bus communications system
- ▶ On-board self-diagnostics
- ▶ Wireless 4G battery monitoring
- ▶ Operator presence sensing system
- ▶ Safety Blue light, LED rear work light, headlights, and strobe
- ▶ Rear grab bar with horn
- ▶ Tilt cylinder boots
- ▶ All-around front wheel drive
- ▶ Side extraction battery



FE4C50-65

5,000-6,500 lbs. Capacity

Four Wheel Lithium-Iron Cushion

The FE4C50-65 cushion tire forklifts are highly efficient, durable Lithium-iron forklifts. They are designed for indoor warehouse applications and other applications with hard smooth floors. The mast system, front/rear axles and chassis are engineered to be tough like an Internal Combustion forklift, but with all the advantages of Lithium-iron. AC drive technology is used to achieve high performance with low operating and maintenance costs. Greatly increase your work productivity with these quiet, very low maintenance, ultra-smooth, lithium-iron forklifts.

PRODUCTIVE. SOLID. SMART.



COMPACT. HIGH PERFORMANCE. EFFICIENT.



Compact design allows for a 360 degree zero-turning radius, enabling the truck to operate in confined spaces.

Operator can select different performance modes on color LCD display to meet different applications. Multi-function LCD display: speed, steer angle, travel direction, battery discharge indicator, hour meter and working mode.

Large 80-volt Lithium-iron battery and regenerative braking system significantly increase operating hours per charge.

High-power oil pump motor and large displacement gear pump increase lifting and lowering speed, and improve working efficiency.



ERGONOMIC. GREAT VISIBILITY.



The large, ergonomic cab and user-friendly design ensures operator comfort throughout the entire work shift. Low entrance height provides operator easy and safe access.

Deluxe suspension, fully adjustable seat reduces vibration to the driver to effectively reduce driver fatigue for all sizes of operators.



On-Demand Fully Hydrostatic Power Steering (FHPS) guarantees smooth steering, preventing over-run and kick-back. Spinner knob allows easier one-handed steering.



Mast layout is optimized for a wide view and clear visibility while operating.

SAFETY. RELIABILITY.



Heavy-duty steel chassis, axles, mast and overhead guard deliver high strength and stability for high lifting heights and heavy loads.



Intelligent buffering effectively protects the ground and cargo from damage while forks descend to the ground.



Safety belt restraint warning system is standard and keeps operator safe and secure while operating the truck.



Operator Presence System (OPS) — When operator is not in seat, the hydraulic lift and tilt controls automatically lock out and traveling is disabled.



Electronic components are all high-quality, well-known brands and ensure optimum performance, smooth control and reliability.



Rear grab bar with horn provides easy horn operation while traveling in reverse and keeps the operator's hand safely within the truck at all times.




Equipped with LED lamps: Rear work lights, headlights, strobe and safety blue light.



Automatic decelerating while turning, improves safety, stability and operator comfort, while preventing product damage.



Driving Speed

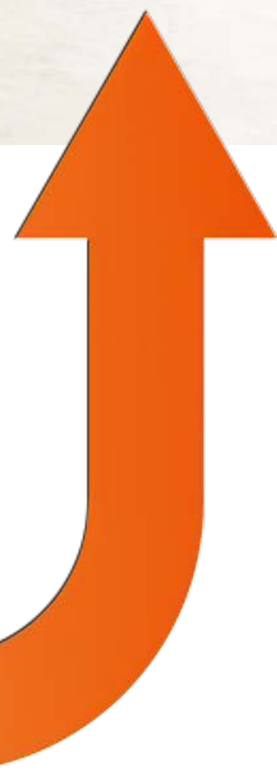

EASY MAINTENANCE



Battery compartment is equipped with a side battery removal assembly for easy removal and replacement.



Removable side panels enable easy service and maintenance, while providing excellent water and dust protection.



Tilt cylinder boots protect tilt cylinder and oil seals from the environment, prolonging cylinder life.



Brake fluid can be added very conveniently by opening the shield cover and oil tank cover.



Easily check truck's condition and troubleshoot with InMotion controller and CAN-bus technology.



Wireless 4G battery monitoring allows for remote battery programming and troubleshooting.

HIGH EFFICIENCY AND SAFE LITHIUM-ION POWER


NOBLELIFT uses Lithium-Iron Phosphate batteries, the longest lasting and safest lithium-ion battery available. Our lithium-ion batteries are equipped with a Battery Management System (BMS), thermal management system, and an automotive-grade DC high-voltage control system. BMS manages charging and discharging data to ensure safety throughout its life cycle.

FE4C50-65 forklifts have a 10 year or 20,000 hours warranty on the lithium-Iron battery.



ADVANTAGES OF LITHIUM-ION POWER

80 VOLT



REMA/
Anderson
plug-in

Fast-charging maintenance-free Lithium-Iron battery is fully charged in 2 hours. Battery can be opportunity charged during user breaks and during shift changes which allows the truck to run continuously through multi-shift operations. No battery changes are necessary.

LITHIUM BATTERY ADVANTAGES

Lead-Acid Battery

Lower fleet availability - Work is interrupted because battery needs to be fully charged before next use

Periodic battery replacement

Outsourced or in-house maintenance personnel required

8-10 Hours - 2 or more batteries per lift truck

Build an expensive battery room with ventilation

Releases hydrogen while charging - Can result in explosion - Acid burns can happen during maintenance

Power loss

Lithium Battery

100% Fleet availability - Opportunity charging allows battery to be charged in between use

Batteries last 3 times longer and do not need to be replaced

No maintenance cost

2 Hours - 1 Battery per lift truck

No battery room needed

No dangerous substances

No power loss - Reduces energy consumption by 35%

TOTAL COST OF OWNERSHIP

UP TO
47%
SAVINGS OVER 5 YEARS

Opportunity Charging Increases Productivity

Lithium Battery Acquisition Cost

Electric Cost

Maintenance Cost

Lead-Acid Battery Acquisition Cost

Electric Cost

Maintenance Cost

Battery Changing, Extra Batteries, Dedicated Battery Room



Internal Combustion Acquisition Cost

Fuel Cost

Maintenance Cost

Mast Table FE4C50							
Designation	Lift height h3 (in)	Free lift height h2 (in)	Closed mast height h1 (in)	Extended mast height h4 (in)	Tilt forward/ backward a/b (°)	Capacity table (lb) C=24in without sideshift single cushion tires	
						FE4C50	FE4C65
Two-stage ZT	98.4	5.3	71.7	136.9	6 / 8	5,000	6,500
	118.1	5.3	81.5	156.5	6 / 8	5,000	6,500
	129.9	5.3	87.4	168.3	6 / 8	5,000	6,500
	137.8	5.3	91.3	176.2	6 / 8	5,000	6,500
	145.7	5.3	95.3	184.1	6 / 8	5,000	6,500
	157.5	5.3	103.1	195.9	6 / 6	5,000	6,500
	169.3	5.3	109.1	207.7	6 / 6	5,000	6,410
	177.2	5.3	113.0	215.6	6 / 6	4,910	6,350
	196.9	5.3	122.8	235.3	6 / 6	4,580	6,050
Two-stage ZZ	98.4	34.7	71.7	136.9	6 / 8	5,000	6,500
	118.1	44.5	81.5	156.5	6 / 8	5,000	6,500
	129.9	50.4	87.4	168.3	6 / 8	5,000	6,500
	137.8	54.4	91.3	176.2	6 / 8	5,000	6,500
	145.7	58.3	95.3	184.1	6 / 6	5,000	6,500
	157.5	66.2	103.1	195.9	6 / 6	5,000	6,500
Three-stage DZ	157.5	36.5	69.1	195.0	6 / 6	5,000	6,500
	171.3	41.5	74.0	208.7	6 / 6	5,000	6,390
	177.2	43.4	78.9	214.6	6 / 6	4,890	6,300
	189.0	47.4	80.9	226.5	6 / 6	4,740	6,190
	196.9	50.3	84.8	234.3	6 / 6	4,540	6,040
	216.5	57.2	87.8	254.0	6 / 6	4,050	5,640
	236.2	65.1	94.7	273.7	6 / 6	3,520	4,180
Four-stage DZ	240.2	46.0	84.1	276.6	6 / 3	3,520	4,180
	259.8	50.9	89.0	296.3	6 / 3	2,970	3,300
	275.6	57.2	95.3	312.0	6 / 3	1,760	2,090

Free lifting height without stop shelf +11.9 in.

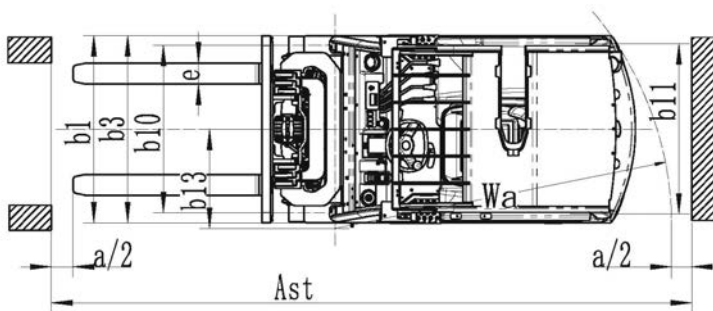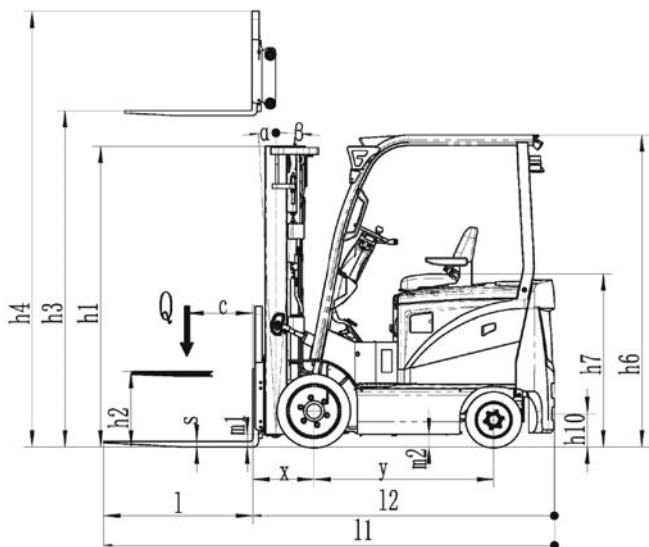

Identification				
1.1	Manufacturer		NOBLELIFT	
1.2	Model		FE4C50	FE4C65
1.3	Drive (electric – battery or mains, diesel, petrol, gas, manual)		Electric	
1.4	Type of operation (hand, pedestrian, standing, seated, order picker)		Seated forklift	
1.5	Load capacity / rated load	Q (lb)	5,000	6,500
1.6	Load center distance	c (in)	24	
1.8	Load distance, center of drive axle to fork	x (in)	17.3	17.5
1.9	Wheel base	y (in)	51	55
Weights				
2.1	Service weight including battery (see line 6.5)	lb	9,405	10,175
2.2	Axle loading, laden front / rear	lb	12,705 / 2,200	14,245 / 2,530
2.3	Axle loading, unladen front / rear	lb	3,465 / 5,940	3,905 / 6,270
Wheels, Chassis				
3.1	Tires (solid rubber, superelastic, pneumatic, polyurethane)		Solid rubber	
3.2	Tire size, front		21x7-15	21x8-15
3.3	Tire size, rear		16x6-10.5	
3.5	Wheels, number front / rear (x = driven wheels)		2x / 2	
3.6	Track width, front	b ₁₀ (in)	37.7	35.5
3.7	Track width, rear	b ₁₁ (in)	36.3	
Basic Dimensions				
4.1	Mast / fork carriage tilt forward / backward	a/b (°)	6 / 8	
4.2	Lowered mast height	h ₁ (in)	85.4	
4.3	Free lift	h ₂ (in)	4.7	
4.4	Lift height	h ₃ (in)	118.1	
4.5	Extended mast height	h ₄ (in)	156.6	160.6
4.7	Overhead load guard height	h ₆ (in)	88.6	
4.8	Seat height / standing height	h ₇ (in)	49.2	
4.12	Coupling height	h ₁₀ (in)	11.6	
4.19	Overall length	l ₁ (in)	127	133.3
4.20	Length to face of forks	l ₂ (in)	84.8	91.1
4.21	Overall width	bl (in)	42.5	44.7
4.22	Fork dimensions	s/e/l (in)	1.6 / 4.7 / 42.1	1.6 / 4.9 / 42.1
4.24	Fork carriage width	b ₃ (in)	40.9	43.3
4.31	Ground clearance, laden, under mast	m ₁ (in)	4.3	
4.32	Ground clearance, center of wheelbase	m ₂ (in)	4.7	
4.33	Right Angle Stack with 40x48 pallet	Ast (in)	141.3	145.5
4.35	Turning radius	Wa (in)	76.8	80.7
Performance Data				
5.1	Travel speed, laden / unladen	mph	9.3 / 9.3	
5.2	Lift speed, laden / unladen	fpm	67 / 79	
5.3	Lowering speed, laden / unladen	fpm	<118	
5.5	Drawbar pull, laden / unladen S2 60 min	blf	7,260 / 5,060	8,360 / 6,160
5.7	Max. Gradient performance, laden / unladen S2 5 min	%	15 / 20	
5.10	Service brake		Hydraulic	
E-Motor				
6.1	Drive motor rating S2 60 min	HP	16.1	
6.2	Lift motor rating at S3 15%	HP	21.4	
6.3	Battery standard		Lithium-iron phosphate	
6.4	Battery voltage, nominal capacity K5	V/Ah	80 / 412	
6.5	Battery weight	lb	704	
	Battery dimensions l/w/h	in	38.6 / 24.8 / 23.8	
	Charger standard	V/A	80 / 200 208-240V or 480V 3-phase	
	Operating Temperature	°F	-4 to 131	
Other Details				
8.1	Type of drive control		AC	
8.2	Operating pressure for attachments	psi	2,538	
8.3	Oil volume for attachments	gmp	570	
8.4	Sound level at driver's ear according to EN 12 053	dB(A)	73	

A GLOBAL LEADER

NOBLELIFT is a global leader in Lithium-ion Technology. We manufacture more than 200 categories and around 30 series of each product. Our products are designed to meet different application demands and are well accepted by our customers in more than 100 countries and regions in Europe, America, Asia, Africa and more.

Products include: sit-down forklifts, rough terrain forklifts, narrow aisle forklifts, walkie-stackers, order pickers, electric pallet trucks, scissor lifts, tuggers, scrubbers, lift tables, manual pallet jacks and more.



FORKLIFTS



NARROW AISLE



STACKERS



POWERED PALLET TRUCKS



SCISSOR LIFTS



TUGGERS



SCRUBBERS

NOBLELIFT
N O R T H A M E R I C A

2475 S. Wolf Road
Des Plaines, IL 60018
T: 847-595-7100
F: 847-595-7200
sales@nobeliftna.com
www.nobeliftna.com



Website

AUTHORIZED DEALER

